



การพัฒนากระบวนการผลิตเคมีภัณฑ์แพลตฟอร์มจากชีวมวลลิกโนเซลลูโลสอย่างยั่งยืน Sustainable Development and Progress of Lignocellulose Conversion to Platform Chemicals

ธนกร รื่นสดใส และ มาลินี ศรีอริยานนท์*

ศูนย์วิจัยอุตสาหกรรมเคมีชีวภาพและวิศวกรรมกระบวนการแบบอัตโนมัติ สาขาวิชาวิศวกรรมเคมีและกระบวนการ บัณฑิตวิทยาลัย วิศวกรรมศาสตรบัณฑิตสิรินธร ไทย-เยอรมัน มหาวิทยาลัยเทคโนโลยีพระจอมเกล้าพระนครเหนือ

Thanakorn Ruensodsai and Malinee Sriariyanun*

Biorefinery and Process Automation Engineering Center, Department of Chemical and Process Engineering, The Sirindhorn International Thai-German Graduate School of Engineering, King Mongkut's University of Technology North Bangkok, Bangkok, Thailand

*Corresponding Author, E-mail: macintous@gmail.com

DOI: 10.14416/j.kmutnb.2022.03.001

© 2022 King Mongkut's University of Technology North Bangkok. All Rights Reserved.

A biorefinery is analogous process of a petroleum refinery, with the type of raw material being the key difference. For petroleum refinery, crude fossil fuels are distilled into fuels and refined to petrochemicals. Biorefining is defined as “the sustainable conversion of biomass into a spectrum of marketable bio-based goods (chemicals, materials) and bioenergy (biofuels, power, heat)” by the International Energy Agency's Bioenergy Task 42 [1], [2]. Based on this definition, biomass can be converted into a wide array of chemicals and energy carriers in a biorefinery, and it can also contribute to the development of a circular economy [3]. This concept is based on the idea that lignocellulosic materials are reused, recycled and converted to bio-based products. Lignocellulose is composed of cellulose, hemicellulose and lignin and it is

present in all plant species, and it is the most abundant biomass on earth. To achieve the circular economy concept, the agricultural wastes from industrial and agricultural activities, such as corncobs, bagasse, softwood sawdust and hardwood waste paper are utilized as raw materials for a biorefining process. Currently, lignocellulose waste is produced after harvesting seasons and mostly is combusted on the field without proper management that is become the main source of PM10 and PM 2.5 dust problem, a serious air pollution. Therefore, the lignocellulose biorefinery concept aligns with the United Nations Climate Change (UN COP26) mission that aims to a sustainable development goal (SDG) by using alternative materials to convert to energy, instead of using fossil fuels, to reduce the emission of toxic substances into the environment.

การอ้างอิงบทความ: T. Ruensodsai and M. Sriariyanun, “Sustainable development and progress of lignocellulose conversion to platform chemicals,” *วารสารวิชาการพระจอมเกล้าพระนครเหนือ*, ปีที่ 32, ฉบับที่ 4, หน้า 815-818, ต.ค.-ธ.ค. 2565.

Traditionally, lignocellulose biomass is digested anaerobically to produce biogas, and since the 2010s, it has been utilized as raw material for the production of the second generation ethanol. Both biogas and bioethanol are ready to be utilized in industrial and household uses due to their compatibility with the existing processes and infrastructures. However, due to competitiveness with the market prices of ethanol obtained from petroleum, along with the current efficiency of the process to produce the second generation ethanol that still needs more improvement, searching for alternative final products from lignocellulose biorefinery is necessary. Platform chemicals obtained from lignocellulose biomass are groups of potential products with higher market values and wide arrays of downstream processes. Platform chemicals include the small chemical molecules or monomers that are used as substrates in chemical, thermochemical and biochemical reactions to generate more complex chemical compounds or polymers. Several platform chemicals, such as diacid, acetone-butanol-ethanol (ABE), furan, lactic acid, gluconic acid, hydroxyl propionic acid (HPA), glycerol, polyols are demonstrated in the lab stage to be high potential chemicals to synthesize final products for different downstream industries e.g. polymers, constructions, foods, feeds, pharmaceutical, cosmetics and medicals (Figure 1) [4]–[7]. Furthermore, several products obtained from lignocellulose platform chemicals have been technologically upscaled and transferred to industrial productions, such as poly(ethylene succinate) (PES) and poly(butylene succinate) (PBS) [8]. These advanced products have potential to add up the values to the bioethanol

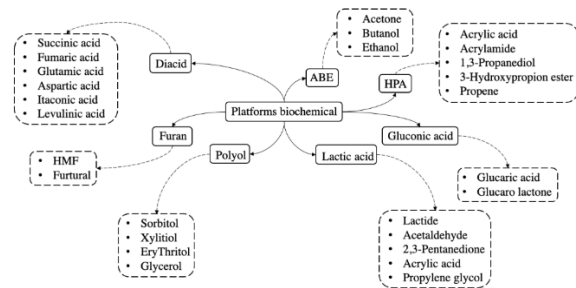


Figure 1 Platform chemicals and their destinations.

(0.9–1.1 USD) up to ten times for polymers (10–30 USD/kg) and this process concept could be considered to fit with the bioeconomy concept.

However, one major bottleneck of the production and manufacturing of lignocellulose-derived platform chemicals is their infeasible economics. In general, the biorefining process of lignocellulose is composed of 4 steps, including pretreatment, hydrolysis, conversion/fermentation and product recovery/purification. Pretreatment and hydrolysis have been demonstrated to be the major cost of the overall process (up to 70%) because the structures of lignocellulose are tough and resistant to breaking down into small molecules of monomers. Therefore, pretreatment with different methods to allow the modification of lignocellulose and make it more vulnerable to hydrolysis is developed. The mechanisms of pretreatment to promote biomass hydrolysis include the removal of the inhibitory byproducts, an increase of surface areas, modification of biomass molecular arrangements. Various pretreatment methods have been demonstrated for their pros and cons with different operational costs and process complexity. Some chemical pretreatments use hazardous chemicals and generate large amounts of wastewater. The green chemical

pretreatments, such as ionic liquid (IL) and deep eutectic solvent (DES), have been proposed to be highly efficient methods with lower impact on environments, especially due to their recyclability [9]–[12]. Therefore, these methods could be also considered to fit with the green economy concept.

Platform chemicals from lignocellulose are gaining in demand worldwide because they are aligned with Bio, Circular and Green (BCG) economy concept for people who are concerned about sustainable development in industries and have awareness of the tremendous deterioration of the environment. Nevertheless, the production and manufacturing processes of platform chemicals are highly variable, which make them difficult to identify standard process designs. Ultimately, the conditioning process depends on the proposed application. Furthermore, any advice on suitable conditioning methods must be based on a thorough techno-economic assessment and Life-Cycle Assessment (LCA) analysis. Last but not least, the competitions in market positions and users with petroleum-derived platform chemicals are highly challenging due to the differences in scale of production aspect and user acceptance.

Reference

- [1] M. Sririyanun and K. Kitsubthawee, “Trends in lignocellulose biorefinery for production of value-added biochemicals” *Applied Science and Engineering Progress*, vol. 13, no. 4, pp. 283–284, 2020.
- [2] Y. U. Cheng, P. Mutrakulcharoen, S. Chuetor, K. Cheenkachorn, P. Tantayotai, E. J. Panakkal, and M. Sririyanun, “Recent situation and progress in biorefining process of lignocellulosic biomass: Toward green economy,” *Applied Science and Engineering Progress*, vol. 13, no. 4, pp. 299–311, 2020.
- [3] T. Sukontachart, S. Pinthapataya, and W. Simachokedee, “Development of industrial waste management model toward social enterprises for community,” *The Journal of KMUTNB*, vol. 31, no. 1, pp. 158–168, 2021 (in Thai).
- [4] C. Chuensangjun, N. Kongklom, and M. Sririyanun, “Bioplastic: From research to innovation and implementation against global warming,” *The Journal of KMUTNB*, vol. 30, no. 2, pp. 183–185, 2020 (in Thai).
- [5] M. Sririyanun, J. H. Heitz, P. Yasurin, S. Asavasanti, and P. Tantayotai, “Itaconic Acid: A promising and sustainable platform chemical?,” *Applied Science and Engineering Progress*, vol. 12, no. 2, pp. 75–82, 2019.
- [6] P. Rachamontree, T. Douzou, K. Cheenkachorn, M. Sririyanun, and K. Rattanaporn, “Furfural: A sustainable platform chemical and fuel,” *Applied Science and Engineering Progress*, vol. 13, no. 1, pp. 3–10, 2020.
- [7] E. J. Panakkal, N. Kitiborwornkul, M. Sririyanun, J. Ratanapoompinyo, P. Yasurin, S. Asavasanti, W. Rodiahwati, and P. Tantayotai, “Production of food flavouring agents by Enzymatic Reaction and Microbial Fermentation,” *Applied Science and Engineering Progress*, vol. 14, no. 3, pp. 297–312, 2021.
- [8] M. Sririyanun, P. Tantayotai, Y.S. Cheng, P. Pornwongthong, S. Chuetor, and K. Cheenkachorn, “Progress in development of biorefining process,” *Value-Added Biocomposites*, pp. 24, 2021.



- [9] P. L. Show and M. Sriariyanun, "Prospect of liquid biphasic in microalgae research," *Applied Science and Engineering Progress*, vol. 14, no. 3, pp. 295–296, 2021.
- [10] P. Tantayotai, M.P. Gundupalli, E. J. Panakkal, M. Sriariyanun, K. Rattanaporn, and D. Bhattacharyya, "Differential influence of imidazolium ionic on cellulase kinetics in saccharification of cellulose and lignocellulosic biomass substrate," *Applied Science and Engineering Progress*, vol. 15, no. 3, 2021, Art. no. 5510, doi: 10.14416/j.asep.2021.11.003.
- [11] M. Sriariyanun, N. Kitiborwornkul, P. Tantayotai, K. Rattanaporn, and P.L. Show, "One-pot ionic Liquid-mediated bioprocess for pretreatment and enzymatic hydrolysis of rice straw with ionic Liquid-tolerance bacteria cellulase," *Bioengineering*, vol. 9, no. 1, 17, 2022.
- [12] M. P. Gundupalli, P. Tantayotai, E. J. Panakkal, S. Chuetor, S. Kirdponpattaram A. S. S. Thomas, B. K. Sharma, and M. Sriariyanun, "Hydrothermal pretreatment optimization and deep eutectic solvent pretreatment of lignocellulosic biomass: An integrated approach," *Bioresource Technology Reports*, vol. 17, 2022, Art. no. 100967. <https://doi.org/10.1016/j.biteb.2022.100957>.



Mr. Thanagorn Ruensodsai
Researchers



Assoc. Prof. Malinee Sriariyanun
Editorial Board